

Use MiniPCI in
standard
PCI sockets!


MiniPCI v1.0 and
PCI v2.1, v2.2
standards compliant

Use wireless MiniPCI cards
in standard PCI platforms

Two LEDs connected to
MiniPCI

MiniPCI Adapter RouterBOARD 11 (IA/MP1)

MikroTik's RouterBOARD 11 MiniPCI to PCI adapter is an advanced adapter for 3.3v MiniPCI to PCI standard sockets. The adapter is provided in PCI card form with an integrated MiniPCI slot that allows you to use MiniPCI cards in standard PCI sockets. The MiniPCI adapter includes two LEDs connected to the MiniPCI (according to standards).

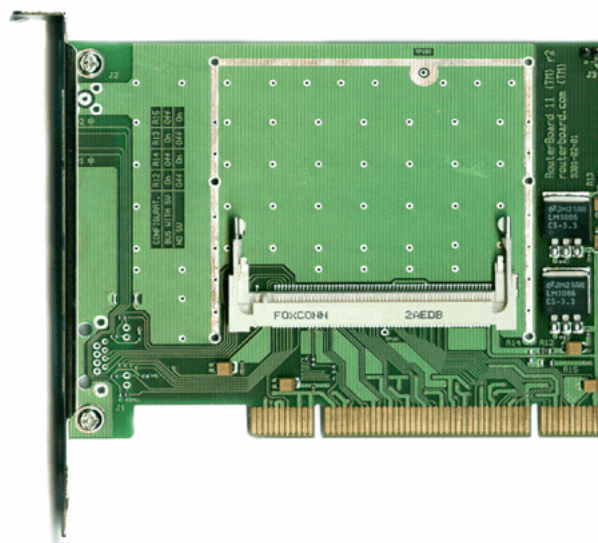

Specifications:

Standards	MiniPCI v1.0 standard compliant; PCI v2.1 and v2.2 compliant
Operation Voltage	PCI 3.3v and 5v support; optional - 3.3v only support (factory option - RouterBOARD 11-3.3)
Input Power	Up to 5w of 3.3v power supplied to Mini PCI card; optional - 3.3v (5w) out header (factory option - RouterBOARD 11-h)
LED	Two LEDs connected to MiniPCI (according to standards)
Operation Temp.	0° C to 70° C
Storage Temp.	-20° C to 80° C
Humidity Range	0% to 90%
Mounting	Mounting for optional tin shield
Connector	Traces for antenna out connector (contact sales for this factory option)
Dimension	122 x 96 x 8 mm

For ordering information, contact sales@mikrotik.com

Office Address
Mikrotikis SIA
Petnavas 46
LV-1009, Riga, LATVIA
Phone: +371 7317700
Fax: +371 7317701
URL: <http://www.mikrotik.com>

OEM Sales Representatives
USA
EUROPE
ASIA
AFRICA
See our Web Page for addresses!